


Product	Steel up to approx. [mm]	NF metal up to approx. [mm]	Aluminium up to approx. [mm]	Alloy steel up to approx. [mm]	Performance
CLF 12 L	0,20	0,35	0,35	—	●
CLF 12	0,20	0,35	0,35	—	● ●
CLF 12 W 10	0,25	0,45	0,45	0,15	● ●
CLF 12 S	0,35	0,60	0,55	0,25	● ● ●
CLF 12 SFL/132	0,45	0,70	0,65	0,25	● ● ● ●
CLF 12 SF	0,60	0,90	0,90	0,35	● ● ● ●
CLF 12 W 25	0,70	1,10	1,10	0,50	● ● ● ● ●
CLF 12 SB	0,90	1,75	1,75	0,60	● ● ● ● ●
CLF 12 SD	1,50	2,00	2,00	0,90	● ● ● ● ● ●
CLF 12 SG	4,00	6,00	4,00	2,50	● ● ● ● ● ● ●

Residue behaviour

Low <<

>> High

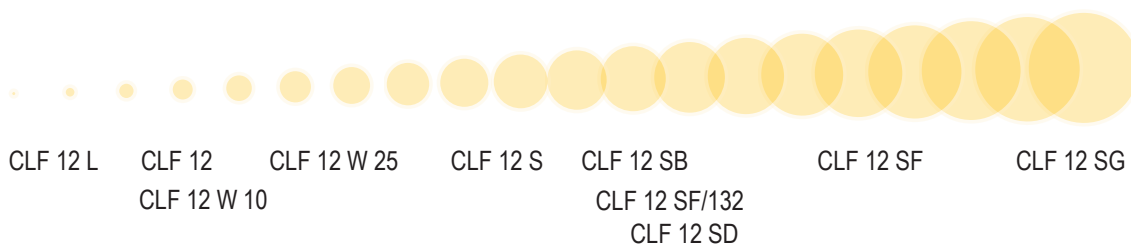

The above mentioned information on the area of application are based on lab tests and practical experiences. These instructions do not release the user from checking the suitability of the lubricant and its application and follow-up processes. We reserve the rights to make changes due to new laws, regulations, perceptions, etc.