


Product	Steel up to approx. [mm]	NF metal up to approx. [mm]	Aluminium up to approx. [mm]	Alloy steel up to approx. [mm]
CLF 25	0,15	0,30	0,30	—
CLF 25 SE	0,25	0,40	0,40	0,15
CLF 25 S	0,30	0,50	0,50	0,20
CLF 25 E	0,60	0,80	0,80	0,30
CLF 25 OP	3,50	5,00	5,00	2,00

(special lubricants for electrical contact production)

Residue behaviour

Low < <

> > High

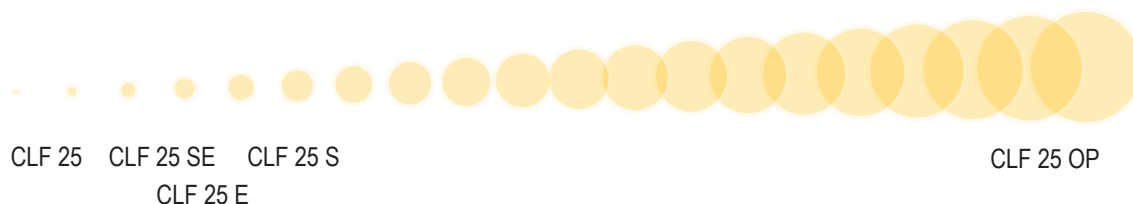

The above mentioned information on the area of application are based on lab tests and practical experiences. These instructions do not release the user from checking the suitability of the lubricant and its application and follow-up processes. We reserve the rights to make changes due to new laws, regulations, perceptions, etc.