


Product	Colour	Viscosity at 40 °C [mm²/s]	Application	Performance
SZ 11	Yellow	–	Stainless steel, Steel, Aluminium, NF metal, Stamping, Fineblanking, Forming	● ● ● ● ●
SZ 1	Yellow	–	Stainless steel, Steel, Aluminium, NF metal, Stamping, Fineblanking, Forming	● ● ● ● ●

Residue behavior

Low <<

>> High

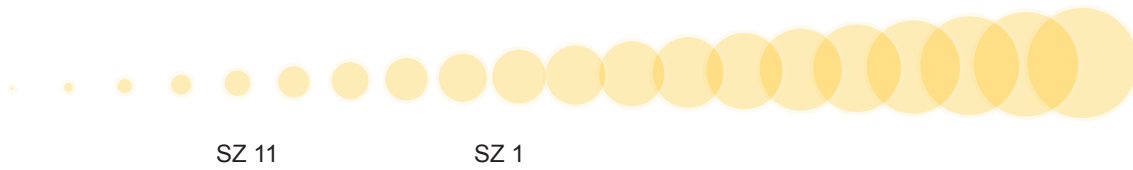

The above mentioned information on the area of application are based on lab tests and practical experiences. These instructions do not release the user from checking the suitability of the lubricant and its application and follow-up processes. We reserve the rights to make changes due to new laws, regulations, perceptions, etc.