


Product	Steel up to approx. [mm]	NF metal up to approx. [mm]	Aluminium up to approx. [mm]	Application	Performance
CLF 1 L	0,15	0,30	0,30	Stanzen, leichte Umformung	●
CLF 1	0,15	0,30	0,30	Stanzen, leichte Umformung	● ●
CLF 1 W 10	0,25	0,40	0,40	Profilieren, Ziehen, Biegen	● ● ●
CLF 1 W 25	0,35	0,50	0,50	Profilieren, Ziehen, Biegen	● ● ● ●

Performance overview

Low < <

> > hoch

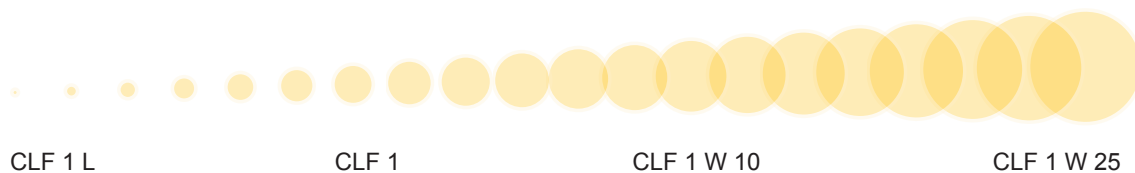

The above mentioned information on the area of application are based on lab tests and practical experiences. These instructions do not release the user from checking the suitability of the lubricant and its application and follow-up processes. We reserve the rights to make changes due to new laws, regulations, perceptions, etc.