


Product	Colour	Viscosity at 40 °C [mm²/s]	Application
CLF 35 FN	Greenish	35	Stainless steel, steel, aluminium
CLF 75 FN	Greenish	75	Stainless steel, steel, aluminium
CLF 100 FN	Greenish	100	Stainless steel, steel, aluminium
CLF 135 FN	Greenish	135	Stainless steel, steel, aluminium
CLF 185 FN	Greenish	185	Stainless steel, steel, aluminium
CLF 255 FN	Greenish	255	Stainless steel, steel, aluminium
CLF 355 FN	Greenish	355	Stainless steel, steel, aluminium
CLF 655 FN	Greenish	655	Stainless steel, steel, aluminium
CLF 125 F	Amber	125	Stainless steel, steel, aluminium
CLF 150 F	Amber	150	Stainless steel, steel, aluminium
CLF 250 F	Amber	255	Stainless steel, steel, aluminium

Performance overview

Low <<

>> High

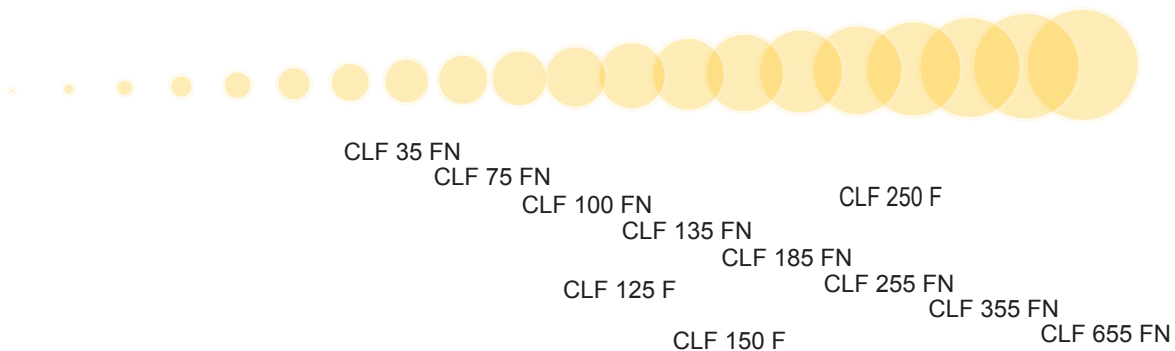

The above mentioned information on the area of application are based on lab tests and practical experiences. These instructions do not release the user from checking the suitability of the lubricant and its application and follow-up processes.

We reserve the rights to make changes due to new laws, regulations, perceptions, etc.