


Product	Colour	Viscosity at 40 °C [mm²/s]	Application
CLF-65 E	Amber	65	Stainless steel, steel, aluminium
CLF-100 E	Amber	100	Stainless steel, steel, aluminium
CLF-150 E	Amber	150	Stainless steel, steel, aluminium
CLF-200 E	Amber	200	Stainless steel, steel, aluminium
CLF-260 E	Amber	260	Stainless steel, steel, aluminium
CLF-400 E	Amber	400	Stainless steel, steel, aluminium
CLF-700 E	Amber	690	Stainless steel, steel, aluminium

### Performance overview

Low < <

> > High

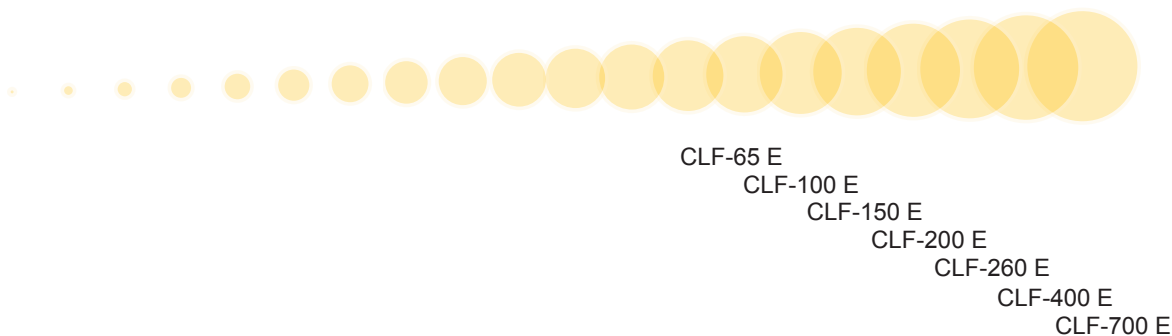

The above mentioned information on the area of application are based on lab tests and practical experiences. These instructions do not release the user from checking the suitability of the lubricant and its application and follow-up processes. We reserve the rights to make changes due to new laws, regulations, perceptions, etc.