


Product	Colour	Viscosity at 40 °C [mm ² /s]	Application	Performance
D CLF	Yellow	47	Steel, aluminium, NF metals	● ●
D CLF 21	Light yellow	25	Steel, aluminium, NF metals	● ● ●
D CLF 30	Amber	30	Stainless steel, steel, aluminium	● ● ● ●
D CLF 40	Amber	40	Stainless steel, steel, aluminium	● ● ● ● ●

Performance overview

Low <<

>> High

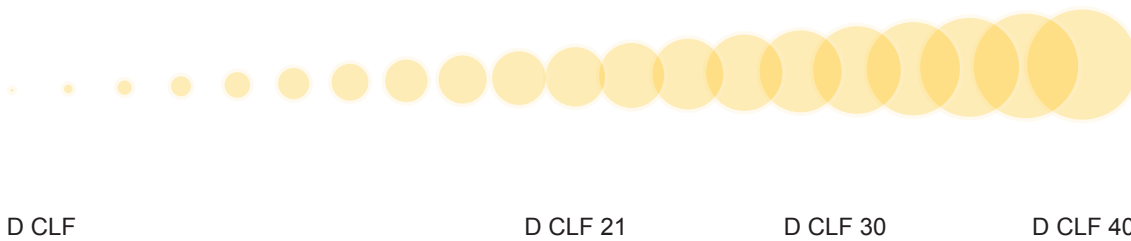

The above mentioned information on the area of application are based on lab tests and practical experiences. These instructions do not release the user from checking the suitability of the lubricant and its application and follow-up processes. We reserve the rights to make changes due to new laws, regulations, perceptions, etc.